

1

SPECTRA B100FLF

Flashing Beacon
5W @ 1Hz BA9s Filament bulb
IP Rating: IP65
Temp: -25°C to +50°C
Unit weight: 93g
CE

Dimensions : Ø60 x 65.5mm
Cable entry: Plugable 2.5mm² terminals

x = Lens colour
R = Red A = Amber
B = Blue G = Green
Y = Yellow C = Clear

Bulb Type BA9s

Order code Voltage
B100FLF012B/x 12V DC 500mA
B100FLF024B/x 24V DC 250mA
B100FLF048B/x 48V DC 120mA

E2S Part No. Version
BR10125B 12V 5W
BR10245B 24V 5W
BR10485B 48V 5W
BR101305B 115V 5W
BR102305B 230V 5W


B100FLF115B/x 115V AC 35mA
B100FLF230B/x 230V AC 25mA

Mountings
Panel mount Ø37mm (PG29)

Tel : +44 (0)20 8743 8880 Fax : +44 (0)20 8740 4200
mail : sales@e2s.com web : www.e2s.com



A SPECTRA B100FLF

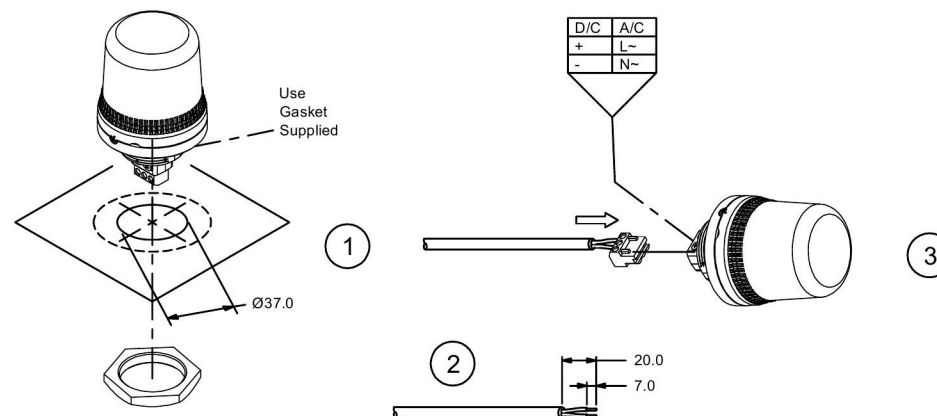

Dimensions in mm



2



ATTENTION: Installation must be carried out by an electrician in compliance with the latest codes and regulations.




ATTENTION: Disconnect from power source before installation or service to prevent electric shock.



ATTENTION: Lens on unit will be hot allow to cool prior to removal.

B

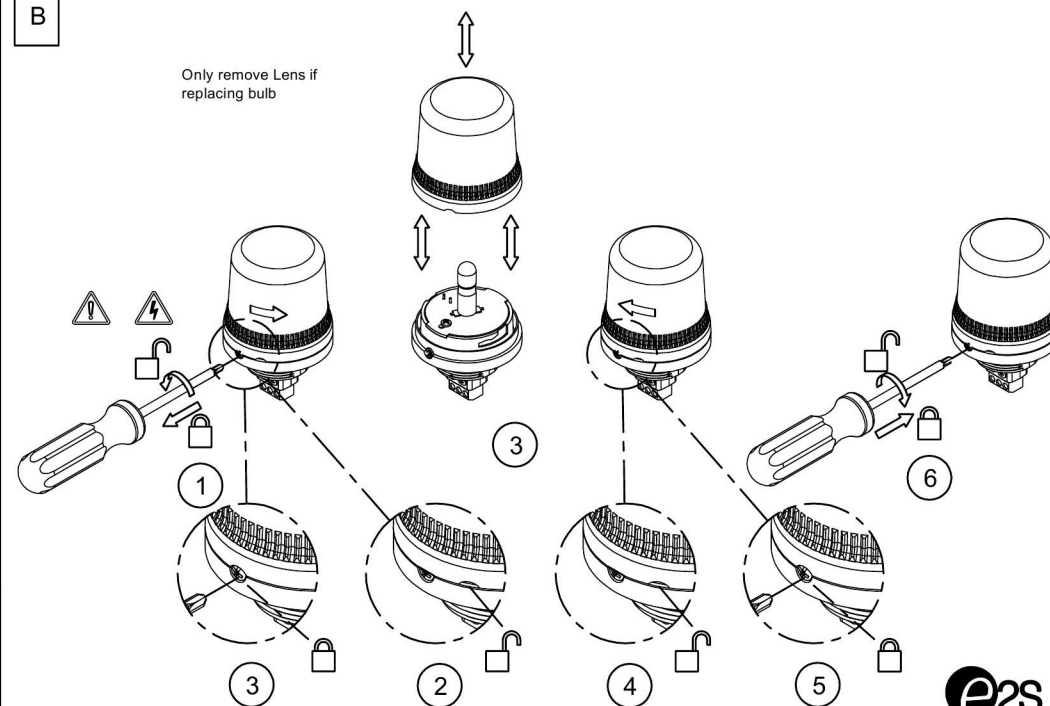

D141-00-001-IS_SHT1_ISSUE_B