

1 SPECTRA B100SLF

Permanent Status Beacon
 5W BA9s Filament Bulb
 IP Rating: IP65
 Temp: -25°C to +50°C
 Unit weight: 90g
 CE

Order code Voltage
 B100SLF0250B/x 12-250V

Mountings
 Panel mount Ø37mm (PG29)

B100SLF unit is supplied without a bulb.
 Please order correct voltage and wattage.

Dimensions : Ø60 x 65.5mm
 Cable entry: Plugable 2.5mm² terminals

x = Lens colour
 R = Red A = Amber
 B = Blue G = Green
 Y = Yellow C = Clear


Bulb Type BA9s

| | |
|--------------|---------|
| E2S Part No. | Version |
| BR10125B | 12V 5W |
| BR10245B | 24V 5W |
| BR10485B | 48V 5W |
| BR101305B | 115V 5W |
| BR102305B | 230V 5W |

Tel : +44 (0)20 8743 8880 Fax : +44 (0)20 8740 4200
 mail : sales@e2s.com web : www.e2s.com



A SPECTRA B100SLF

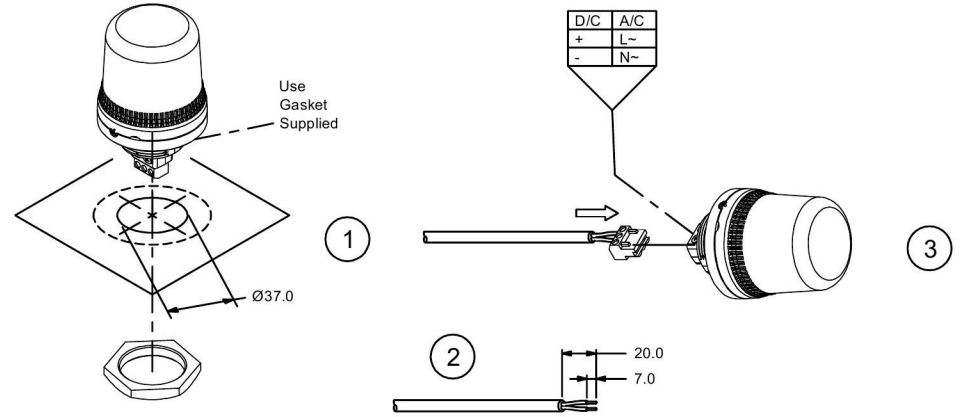

Dimensions in mm



2

- ATTENTION:** Installation must be carried out by an electrician in compliance with the latest codes and regulations.
- ATTENTION:** Disconnect from power source before installation or service to prevent electric shock.
- ATTENTION:** Lens on unit will be hot allow to cool prior to removal.

B

