

1

# SPECTRA B100LDA

Permanent L.E.D. Array Beacon  
 9 x High powered L.E.D's  
 IP Rating: IP65  
 Temp: -25°C to +50°C  
 Unit weight: 93g  
 CE

Order code          Voltage  
 B100LDA030B/x 10-30V DC 80mA

B100LDA230B/x 230V AC 32mA

Mountings  
 Panel mount Ø37mm (PG29)


Dimensions : Ø60 x 65.5mm  
 Cable entry: Plugable 2.5mm<sup>2</sup> terminals

x = Lens colour  
 R = Red                    A = Amber  
 B = Blue                  G = Green  
 Y = Yellow

Tel : +44 (0)20 8743 8880 Fax : +44 (0)20 8740 4200  
 mail : sales@e2s.com web : www.e2s.com



# A SPECTRA B100LDA

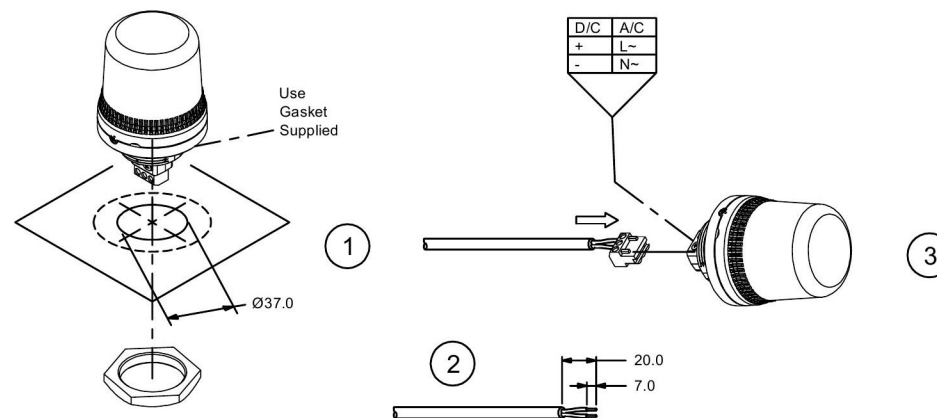

Dimensions in mm



2



**ATTENTION:** Installation must be carried out by an electrician in compliance with the latest codes and regulations.



**ATTENTION:** Disconnect from power source before installation or service to prevent electric shock.



**ATTENTION:** Lens on unit will be hot allow to cool prior to removal.

