

1

SPECTRA B100STR

Xenon Strobe Beacon
 1J @ 0.75Hz
 IP Rating: IP65
 Temp: -25°C to +50°C
 Unit weight: 100g DC, 105g AC
 CE

Order code Voltage
 B100STR030B/x 10-30V DC
 135mA @24V DC

B100STR115B/x 115V AC 30mA
 B100STR230B/x 230V AC 20mA

Mountings
 Panel mount Ø37mm (PG29)


Dimensions : Ø60 x 65.5mm
 Cable entry: Plugable 2.5mm² terminals

x = Lens colour
 R = Red A = Amber
 B = Blue G = Green
 Y = Yellow C = Clear

Tel : +44 (0)20 8743 8880 Fax : +44 (0)20 8740 4200
 mail : sales@e2s.com web : www.e2s.com



A SPECTRA B100STR

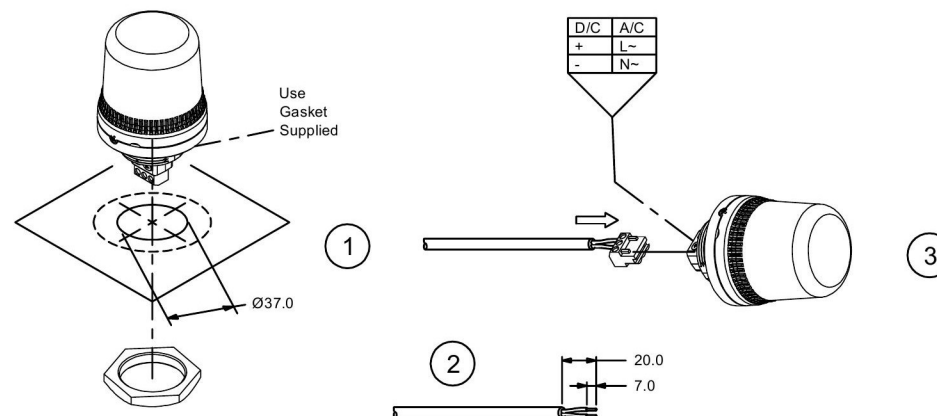

Dimensions in mm



2



ATTENTION: Installation must be carried out by an electrician in compliance with the latest codes and regulations.



ATTENTION: Disconnect from power source before installation or service to prevent electric shock.



ATTENTION: On strobe beacons allow a minimum of 2 minutes for hazardous high voltage to discharge from unit.



ATTENTION: Lens on unit will be hot allow to cool prior to removal.

