

1

SPECTRA B200SLF

Permanent Status Beacon
5W BA9s Filament Bulb
IP Rating: IP65
Temp: -25°C to +50°C
Unit weight: 77g
CE

Order code Voltage
B200SLF250B/x 12-250V

Mountings
B200RAB001 Right angle bracket
B200TMA001 Tube mounting assembly

B200SLF unit is supplied without a bulb.
Please order the correct voltage and wattage.

Dimensions : Ø60 x 80mm
2.5mm² terminals
Cable entry: 1 x 5-7mm push through grommet

x = Lens colour
R = Red A = Amber
B = Blue G = Green
Y = Yellow C = Clear

Bulb Type BA9s

E2S Part No.	Version
BR10125B	12V 5W
BR10245B	24V 5W
BR10485B	48V 5W
BR101305B	115V 5W
BR102305B	230V 5W

Tel : +44 (0)20 8743 8880 Fax : +44 (0)20 8740 4200
mail : sales@e2s.com web : www.e2s.com



2



ATTENTION: Installation must be carried out by an electrician in compliance with the latest codes and regulations.




ATTENTION: Disconnect from power source before installation or service to prevent electric shock.



ATTENTION: Lens on unit will be hot allow to cool prior to removal.




A SPECTRA B200SLF

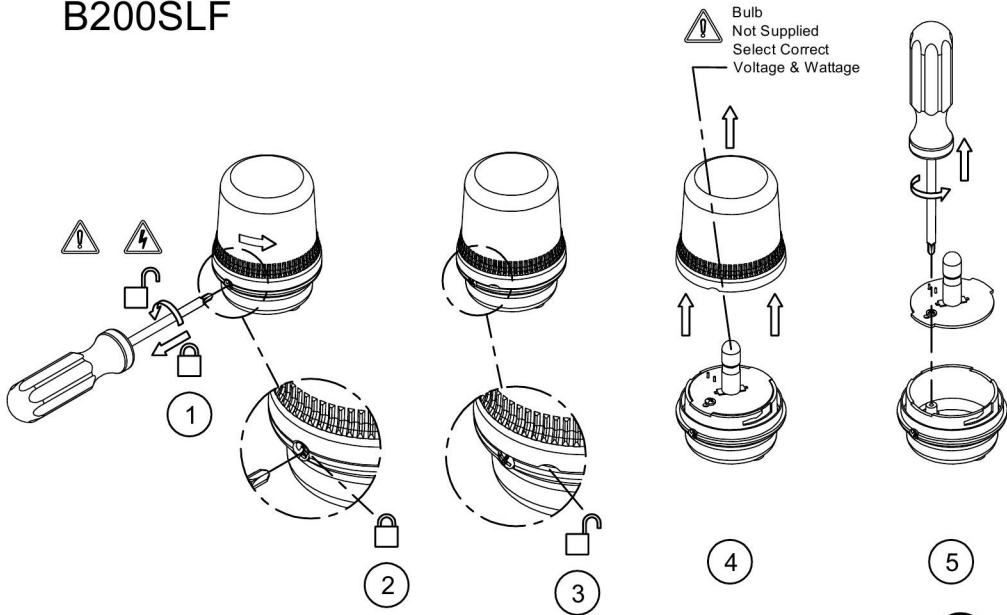

Tel : +44 (0)20 8743 8880 Fax : +44 (0)20 8740 4200
mail : sales@e2s.com web : www.e2s.com




C

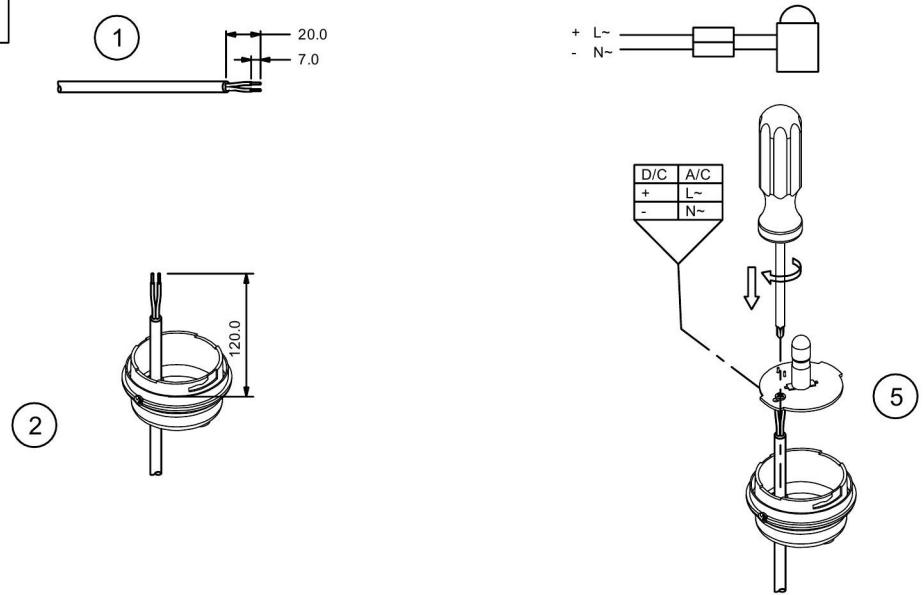

B


MOUNTING OPTIONS	
a	STANDARD BASE
b	POLE MOUNT B200TMA001
c	90° BRACKET B200RAB001

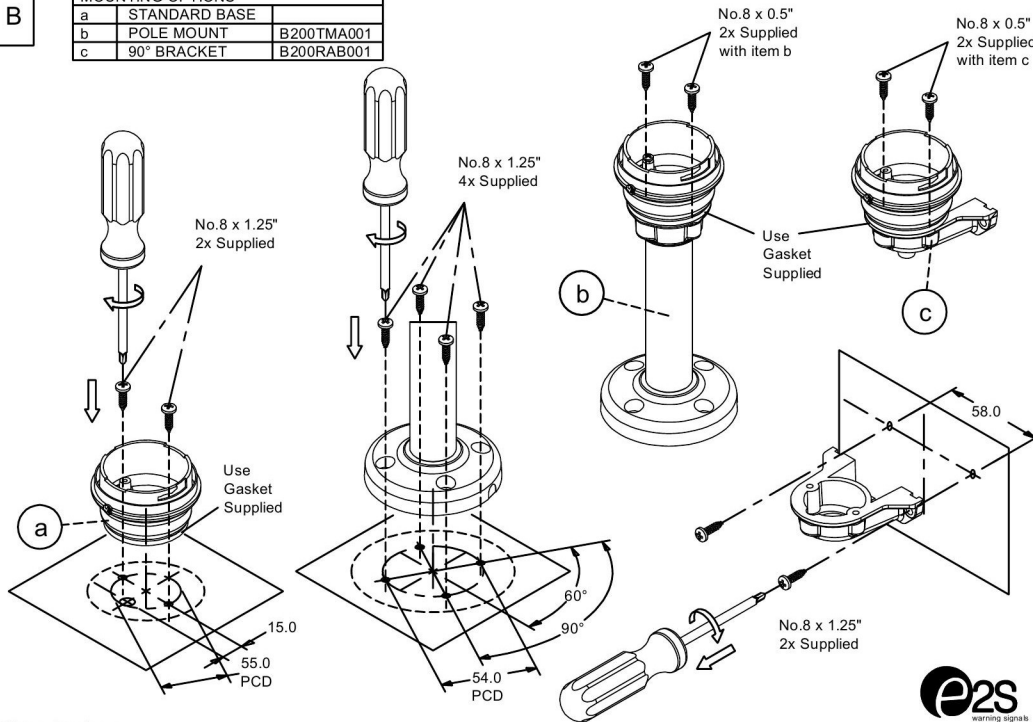

Dimensions in mm



D

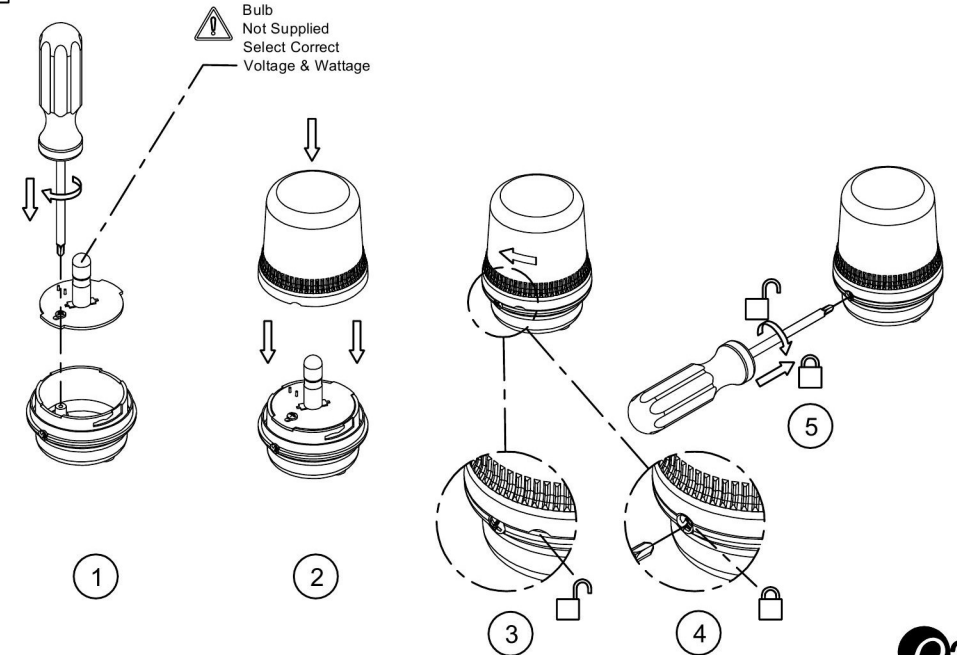

D100-00-001-IS_SHT2_ISSUE_B