

1

SPECTRA B300FLF

Flashing Beacon
E14 Filament bulb
Three selectable frequencies on PCB
IP Rating: IP65
Temp: -25°C to +50°C
Unit weight: 283g
CE

Order code	Voltage
B300FLF012B/x	12V DC 1.75A
B300FLF024B/x	24V DC 1.1A
B300FLF048B/x	48V DC 0.8A

B300FLF115B/x	115V AC 255mA
B300FLF230B/x	230V AC 130mA

Mountings
B300RAB001 Right angle bracket
B300TMA001 Tube mounting assembly

Dimensions : Ø100 x 150mm
1.5mm² terminals
Cable entry: 1 x 5-7mm push through
grommet
1 x M20 cable entry (IP65)

x = Lens colour
R = Red A = Amber
B = Blue C = Clear
G = Green Y = Yellow


Bulb Type E14	Version
E2S Part No.	
BB261225E	12V 25W
BB263025E	24V 25W
BB264825E	48V 25W
BB2613025E	115V 25W
BB2623525E	230V 25W

Tel : +44 (0)2 8743 8880 Fax : +44 (0)20 8740 4200
mail : sales@e2s.com web : www.e2s.com



3

B300FLF

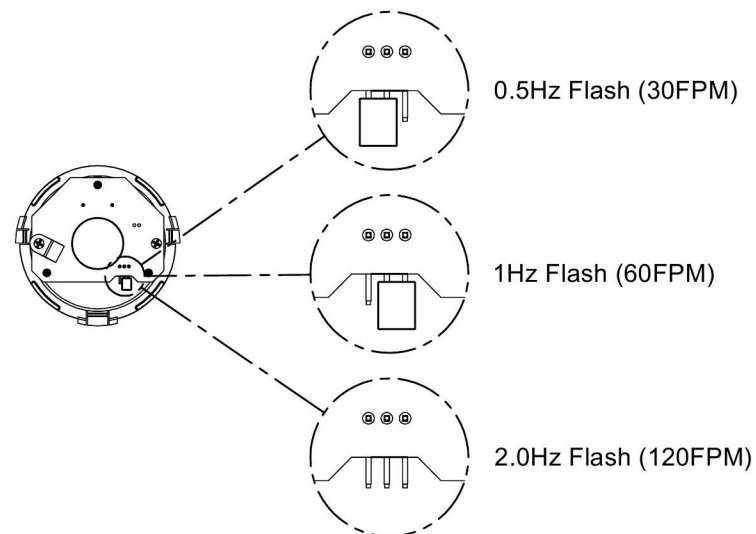

2



ATTENTION: Installation must be carried out by an electrician in compliance with the latest codes and regulations.




ATTENTION: Disconnect from power source before installation or service to prevent electric shock.




ATTENTION: Lens on unit will be hot allow to cool prior to removal.




A SPECTRA B300FLF

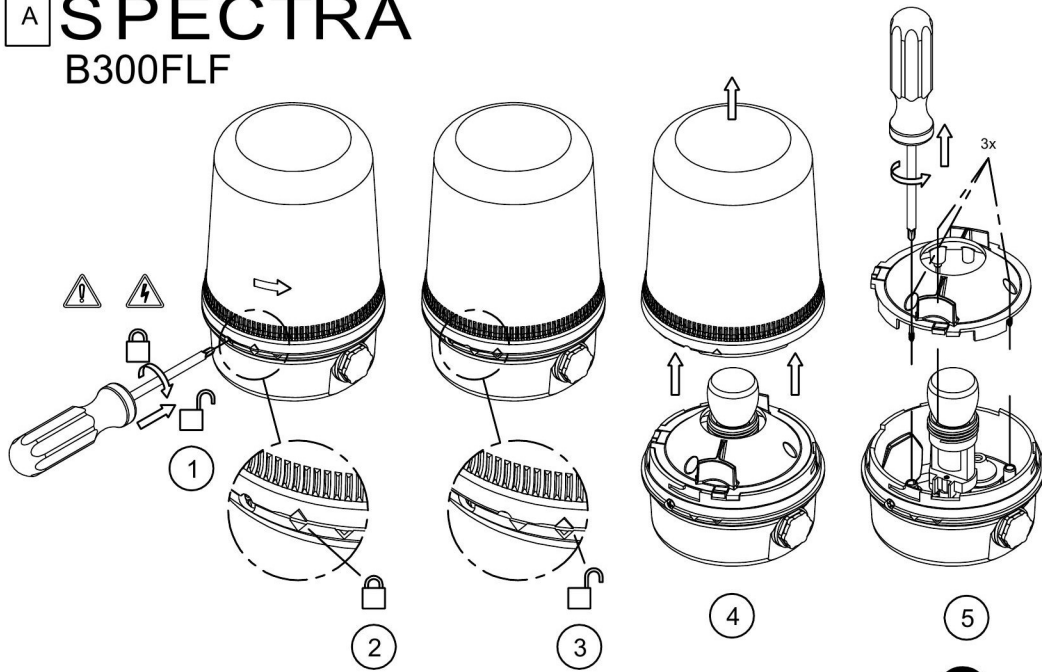


Tel : +44 (0)20 8743 8880 Fax : +44 (0)20 8740 4200
mail : sales@e2s.com web : www.e2s.com

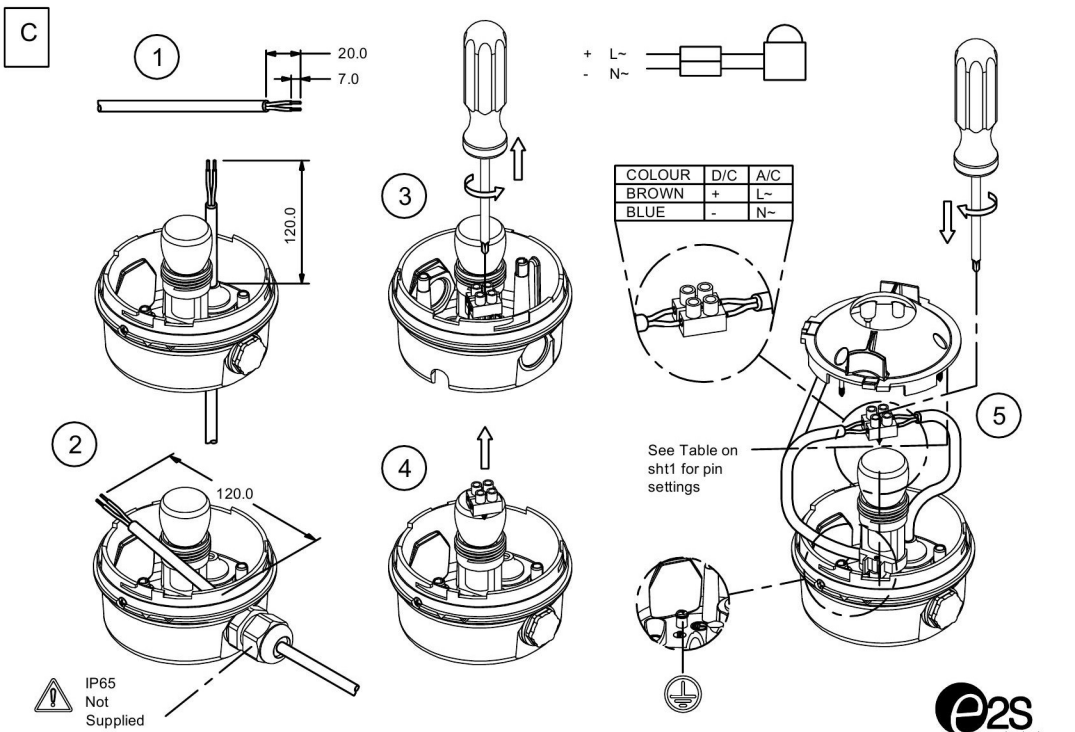

IP65
Not
Supplied

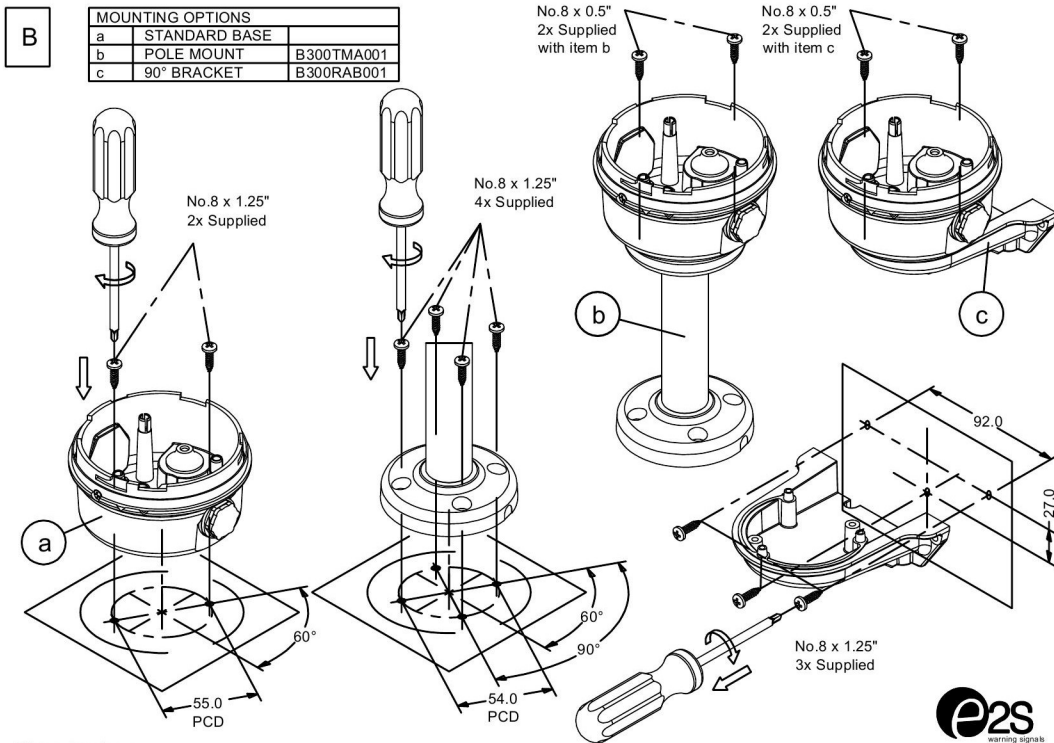

Dimensions in mm

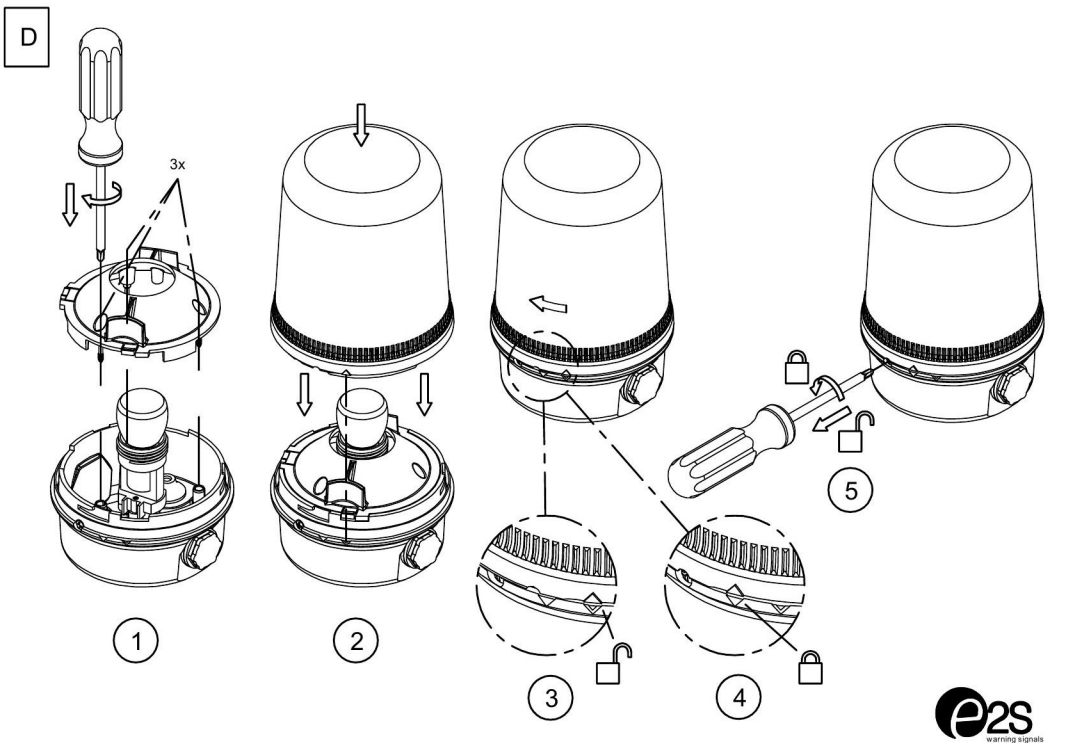

D111-00-101-IS_SHT2_ISSUE_B