

1

SPECTRA B300SLF

Permanent Status Beacon
E14 Filament bulb
IP Rating: IP65
Temp: -25°C to +50°C
Unit weight: 262g
CE

Order code Voltage
B300SLF250B/x 12-250V

Mountings
B300RAB001 Right angle bracket
B300TMA001 Tube mounting assembly

B300SLF unit is supplied without a bulb
Please order correct voltage and wattage

Dimensions : Ø100 x 150mm
1.5mm² terminals
Cable entry: 1 x 5-7mm push through
grommet
1 x M20 cable entry (IP65)

x = Lens colour

R = Red	A = Amber
B = Blue	C = Clear
G = Green	Y = Yellow

Bulb Type E14

E2S Part No.	Version
BB261225E	12V 25W
BB263025E	24V 25W
BB264825E	48V 25W
BB2613025E	115V 25W
BB2623525E	230V 25W

Tel : +44 (0)2 8743 8880 Fax : +44 (0)20 8740 4200
mail : sales@e2s.com web : www.e2s.com



2



ATTENTION: Installation must be carried out by an electrician in compliance with the latest codes and regulations.





ATTENTION: Disconnect from power source before installation or service to prevent electric shock.





ATTENTION: Lens on unit will be hot
allow to cool prior to removal.



A SPECTRA B300SLF

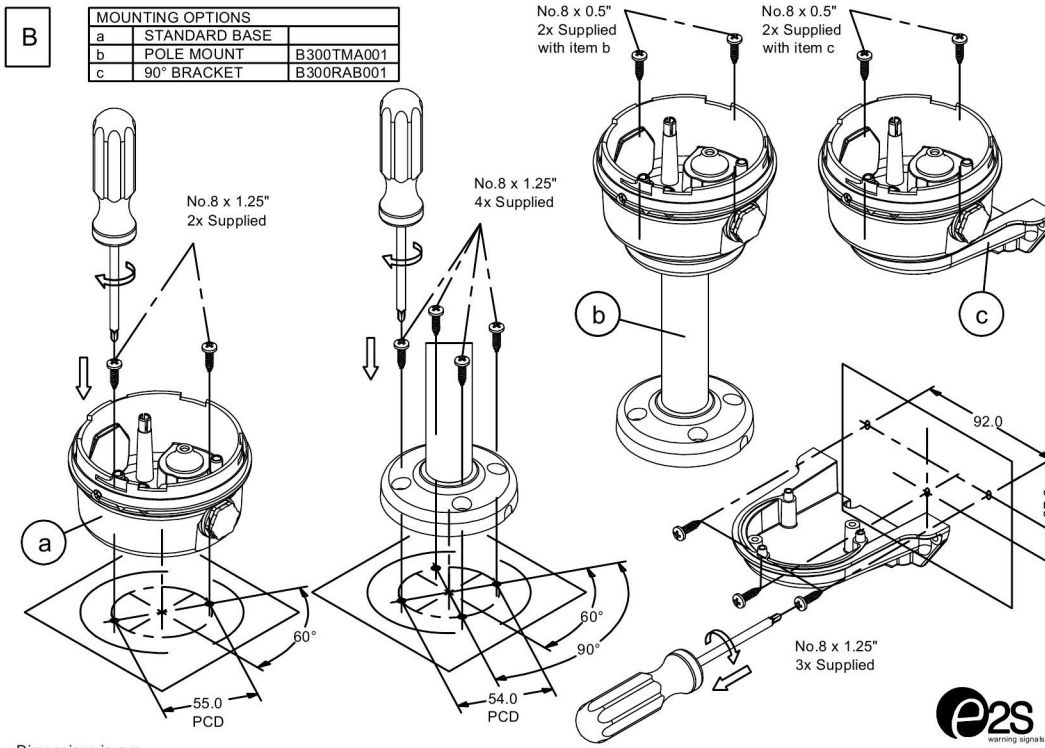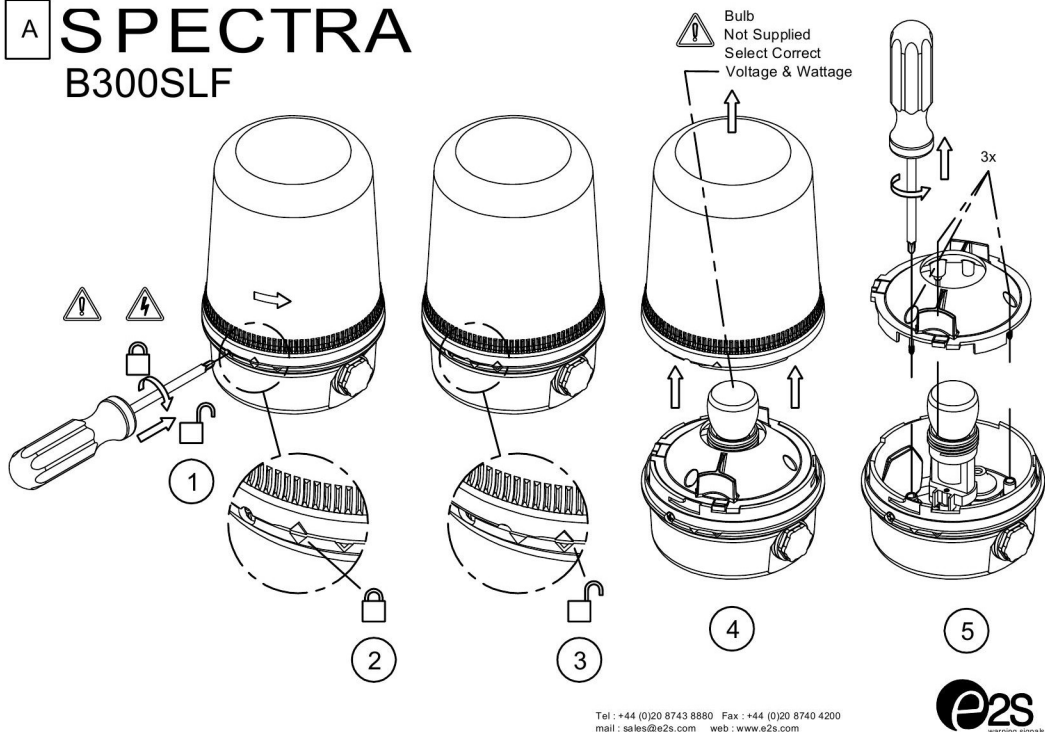

Dimensions in mm

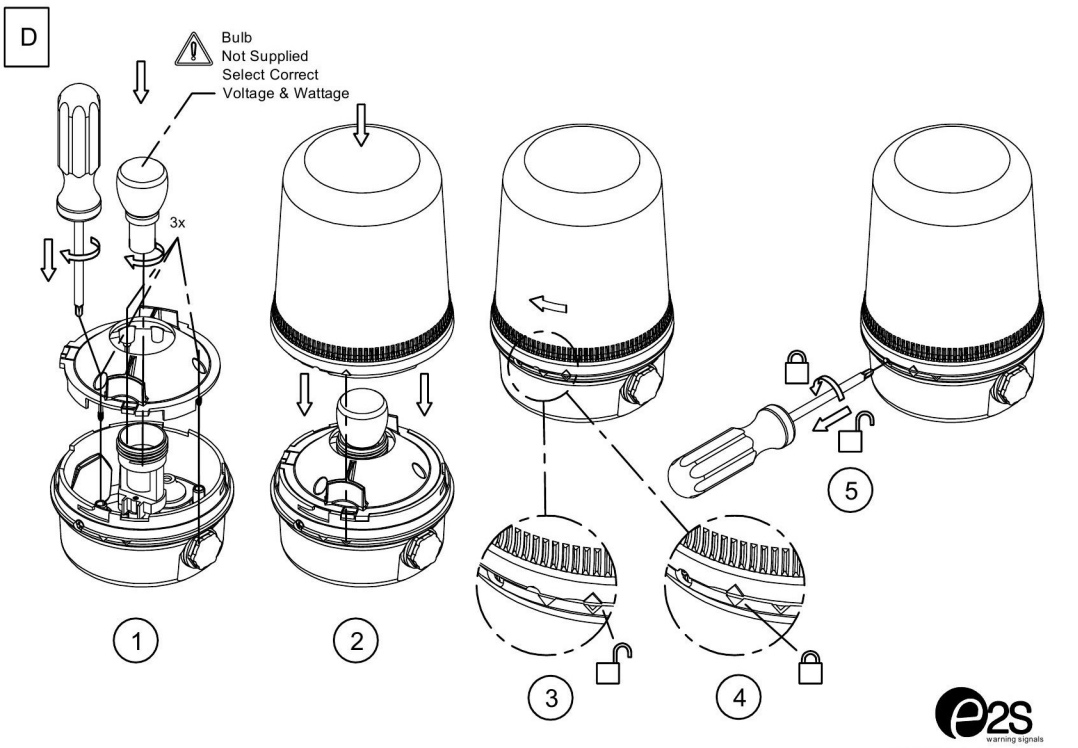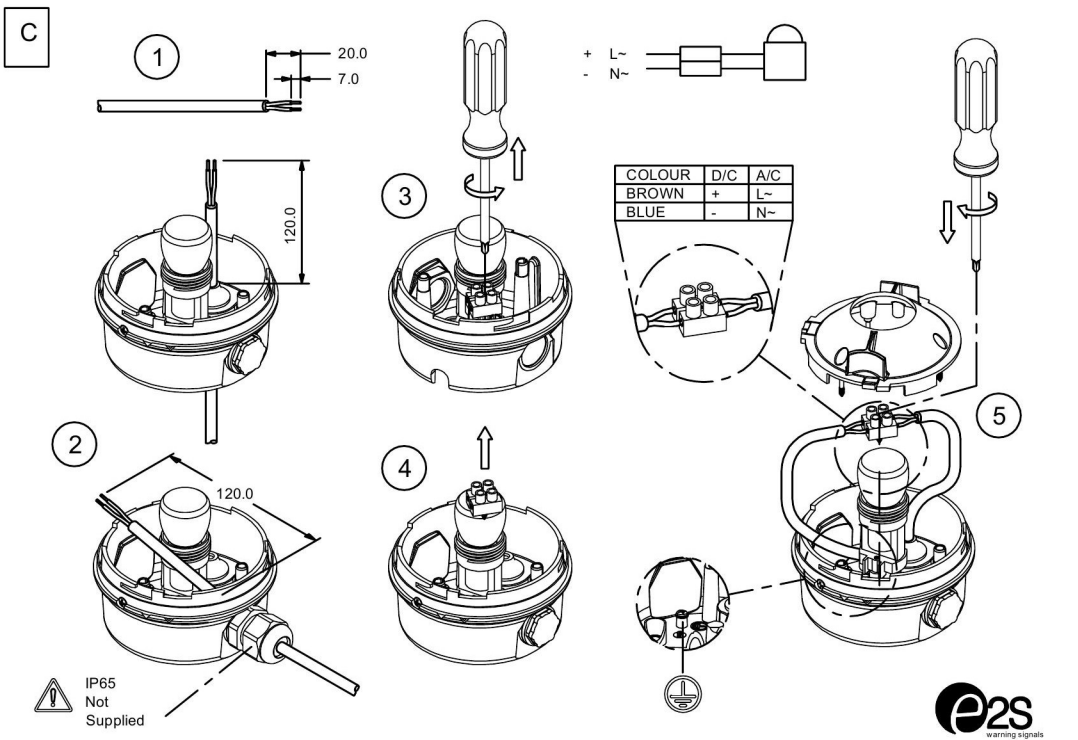

D110-00-101-IS_SHT2_ISSUE_B