

1

SPECTRA B400FLF

Flashing Beacon
E14 Filament bulb
Three selectable frequencies on PCB
IP Rating: IP65
Temp: -25°C to +50°C
Unit weight: 535g
CE

Order code Voltage
B400FLF012B/x 12V DC 4.0A
B400FLF024B/x 24V DC 1.7A
B400FLF24AB/x 24 AC 1.5A

B400FLF115B/x 115V AC 340mA
B400FLF230B/x 230V AC 178mA

Mountings
B400RAB001 Right angle bracket
B400TMA001 Tube mounting assembly

Dimensions : Ø140 x 225mm
1.5mm² terminals
Cable entry: 1 x 5-7mm push through
grommet
2 x M20 cable entry (IP65)

x = Lens colour
R = Red A = Amber
B = Blue C = Clear
G = Green Y = Yellow

Bulb Type E14


E2S Part No.	Version
BG351240E	12V 40W
BG352440E	24V 40W
B457513040E	115V 40W
B457523040E	230V 40W

Tel : +44 (0)20 8743 8880 Fax : +44 (0)20 8740 4200
mail : sales@e2s.com web : www.e2s.com



3

B400FLF

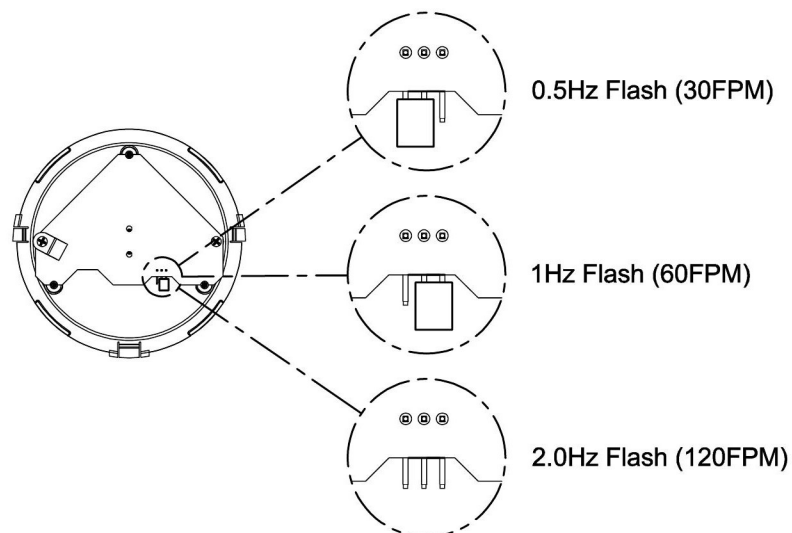

2



ATTENTION: Installation must be carried out by an electrician in compliance with the latest codes and regulations.




ATTENTION: Disconnect from power source before installation or service to prevent electric shock.



ATTENTION: Lens on unit will be hot allow to cool prior to removal.




A SPECTRA B400FLF

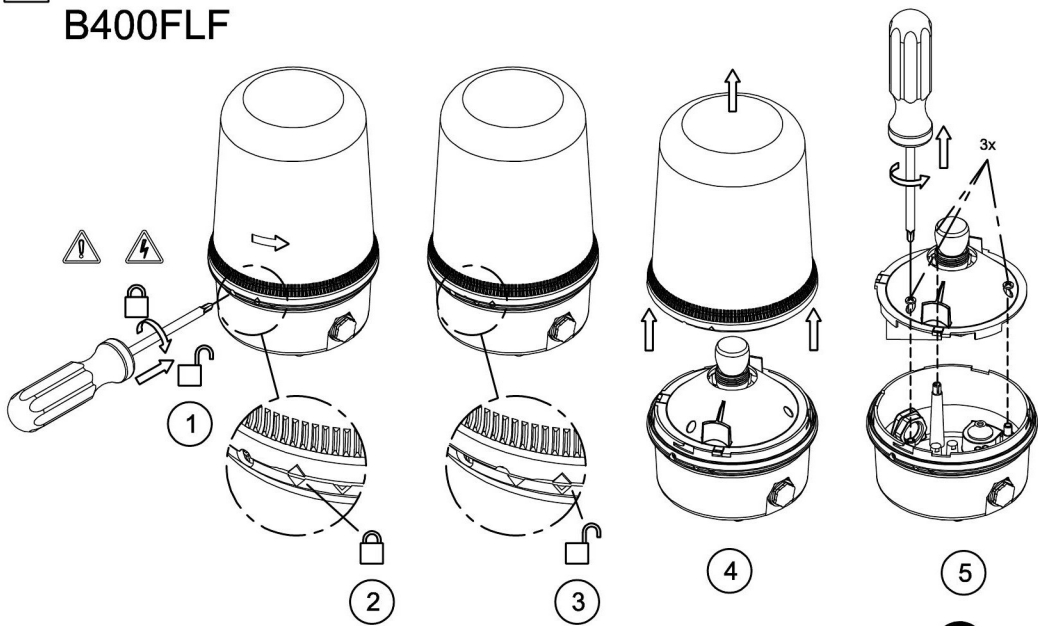

Tel : +44 (0)20 8743 8880 Fax : +44 (0)2 8740 4200
mail : sales@e2s.com web : www.e2s.com




C

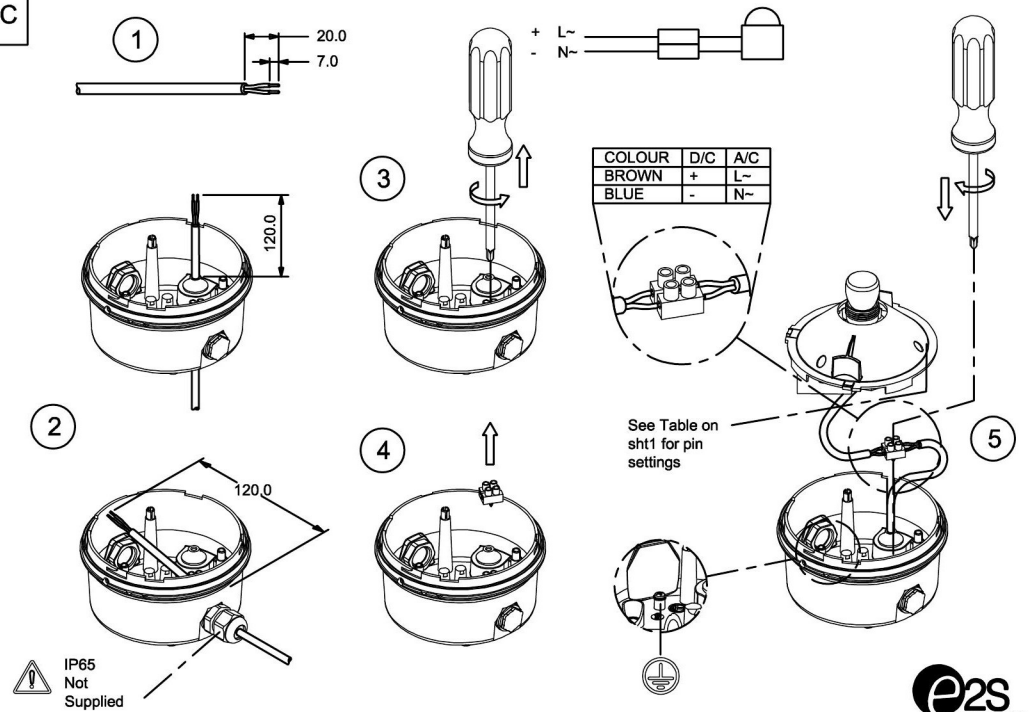

B


MOUNTING OPTIONS		
a	STANDARD BASE	
b	POLE MOUNT	B400TMA001
c	90° BRACKET	B400RAB001

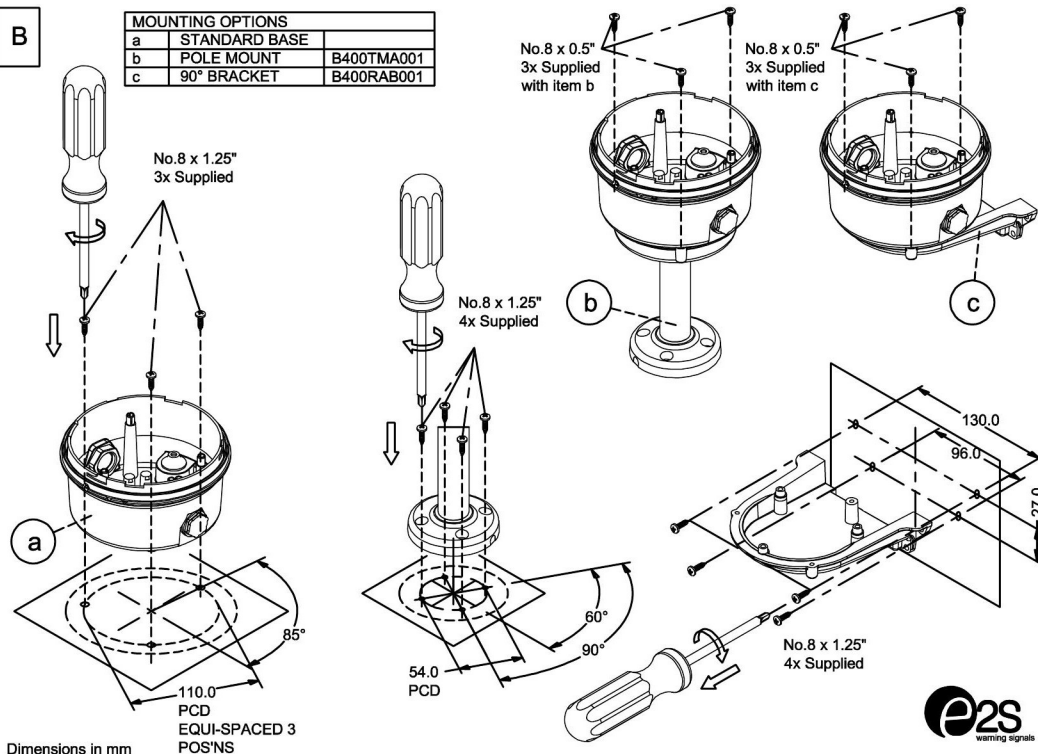

Dimensions in mm



D

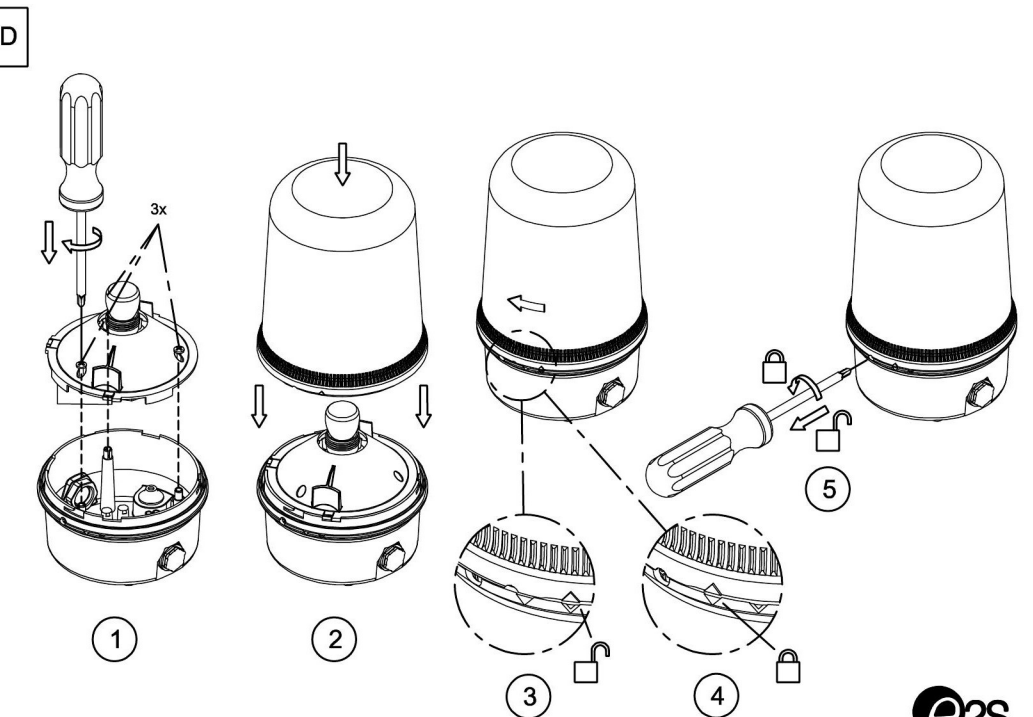

D121-00-1014S_SHT2_ISSUE_D