

1 SPECTRA B400STR

Xenon Strobe Flashing Beacon

15J Xenon FlashTube

Three selectable modes:

- Flashing 1 Hz
- Flashing 1.5 Hz
- Double Strike

IP Rating: IP65

Temp: -25°C to +50°C

Unit weight: 696g DC 632g AC

CE

Dimensions : Ø140 x 225mm

1.5mm² terminals

Cable entry: 1 x 5-7mm push through grommet

2 x M20 cable entry (IP65)

[x] = Lens colour

R = Red

B = Blue

G = Green

A = Amber

C = Clear

Y = Yellow

Order code	Voltage
B400STR024B/[x]	24V DC/AC 870mA
B400STR048B/[x]	48V DC/AC 480mA

B400STR115B/[x]	115V AC 400mA
B400STR230B/[x]	230V AC 225mA

Mountings

B400RAB001 Right angle bracket

B400TMA001 Tube mounting assembly

Tel : +44(0)20 8743 8880 Fax : +44(0)20 8740 4200
mail : sales@e2s.com web : www.e2s.com



2

ATTENTION: Installation must be carried out by an electrician in compliance with the latest codes and regulations.



ATTENTION: Disconnect from power source before installation or service to prevent electric shock.

ATTENTION: On strobe beacons allow a minimum of 2 minutes for hazardous high voltage to discharge from unit.


ATTENTION: Lens on unit will be hot allow to cool prior to removal.




3 B400STR

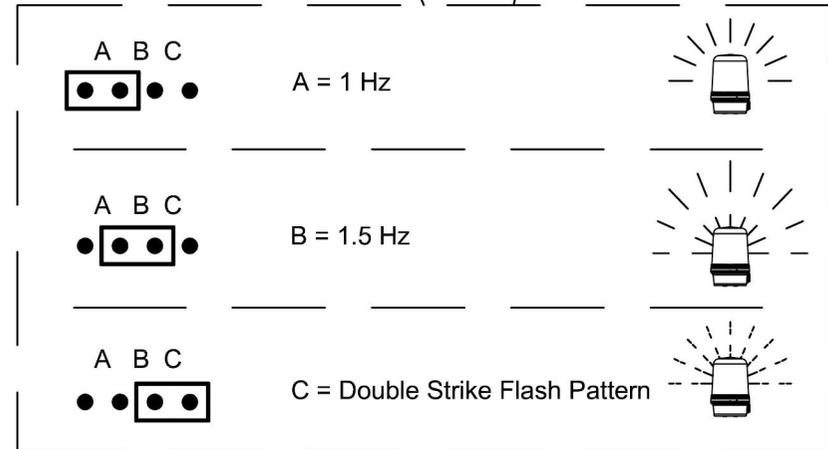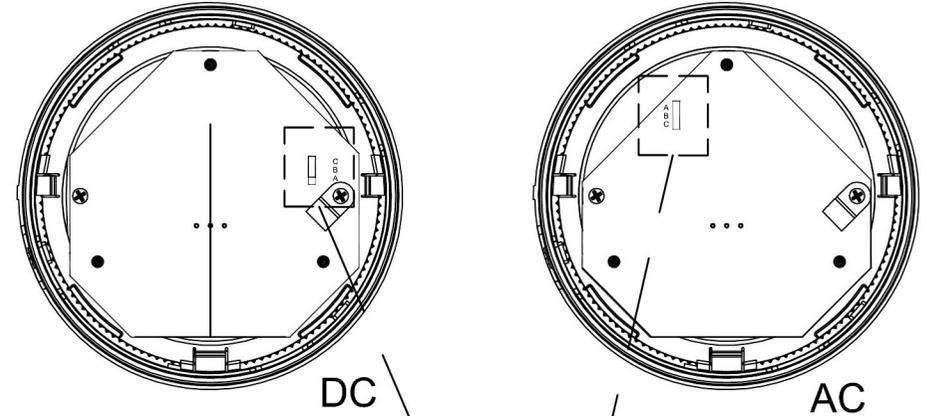

A SPECTRA B400STR

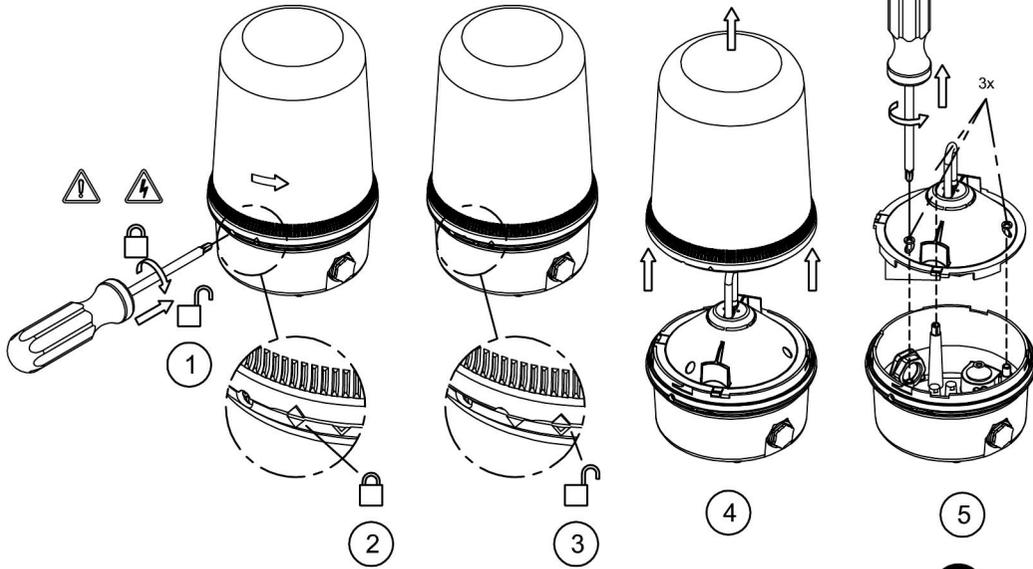

Tel : +44(0)20 8743 8880 Fax : +44(0)2 8740 4200
mail : sales@e2s.com web : www.e2s.com

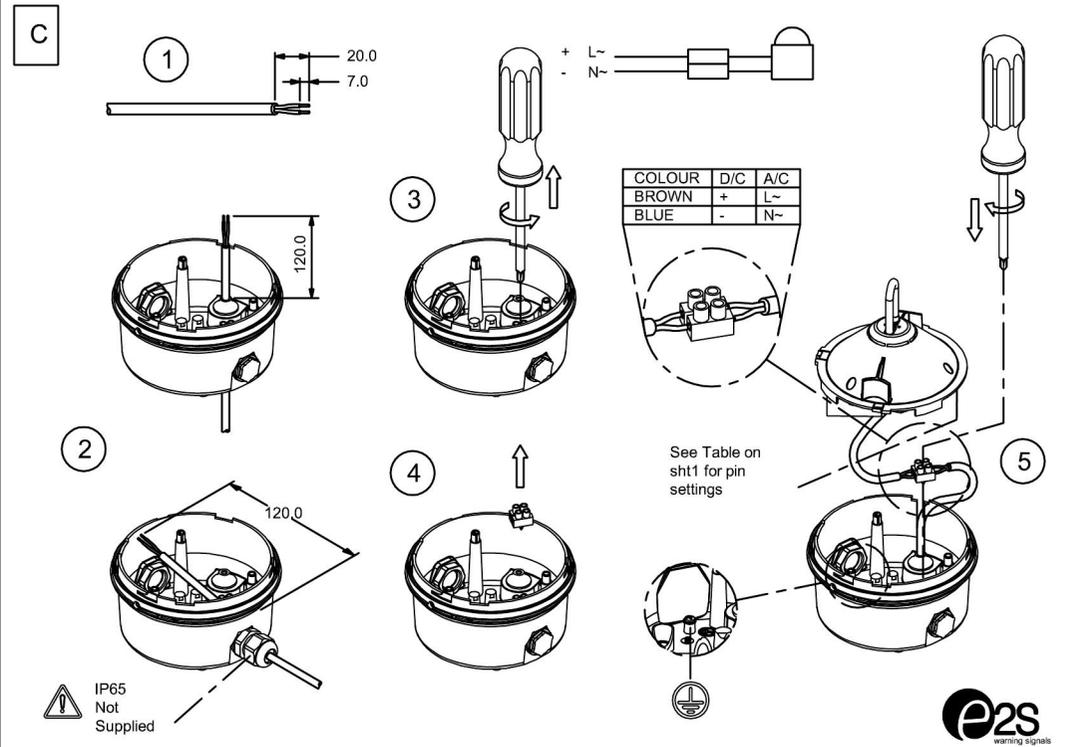

B

MOUNTING OPTIONS	
a	STANDARD BASE
b	POLE MOUNT B400TMA001
c	90° BRACKET B400RAB001

